

Hinged Split Ring - Plain SF Series

Product Features

- Size Range: 1/2" through 2"
- Material: Malleable iron
- Finish: Plain
- Installation: Permanent installation of clamp may be made before the tubing is placed in position. Final installation is attained by swinging the lower portion of the hinged clamp up under the tubing and inserting a single screw securely.
- Hinged design provides for economical installation
- Designed to provide a tight fit on standard steel pipe.




Certifications

- Approvals: Complies with Federal Specification WW-H-171-E (Type 25), MSS SP-69 and MSS SP-58 (Type 12).

Hinged Split Ring: Loads (LBS) • Weights (LBS) • Dimensions (IN)

Tube-Size	✓ To Submit	Part No.	Max Load	Weight	B
1/2"		ML36972	180	0.13	7/8
3/4"		ML36973	180	0.15	1 1/16
1"		ML36974	180	0.17	1 1/8
1 1/4"		ML36975	180	0.28	1 1/4
1 1/2"		ML36976	180	0.29	1 7/16
2"		ML36977	180	0.32	1 5/8

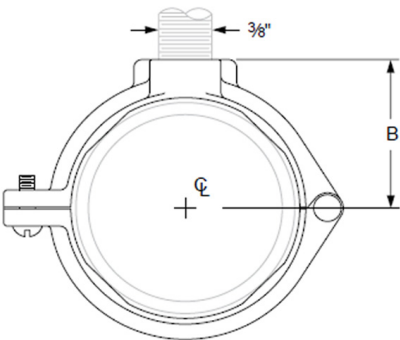

Warranty

See warranty information for more details

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Hinged Split Ring - Galv SF Series

Product Features

- Size Range: 1/2" through 4"
- Material: Malleable iron
- Finish: Electro-Zinc Galvanized
- Installation: Permanent installation of clamp may be made before the tubing is placed in position. Final installation is attained by swinging the lower portion of the hinged clamp up under the tubing and inserting a single screw securely.
- Hinged design provides for economical installation
- Designed to provide a tight fit on standard steel pipe.




Certifications

- Approvals: Complies with Federal Specification WW-H-171-E (Type 25), MSS SP-69 and MSS SP-58 (Type 12).

Hinged Split Ring: Loads (LBS) • Weights (LBS) • Dimensions (IN)

Tube-Size	✓ To Submit	Part No.	Max Load	Weight	B
1/2"		ML36984	180	0.13	7/8
3/4"		ML36985	180	0.15	1 1/16
1"		ML36986	180	0.17	1 1/8
1 1/4"		ML36987	180	0.28	1 1/4
1 1/2"		ML36988	180	0.29	1 7/16
2"		ML36989	180	0.32	1 5/8
2 1/2"		ML36990	300	0.39	2 1/8
3"		ML36991	300	0.48	2 7/16
4"		ML36992	300	1.06	2 7/8

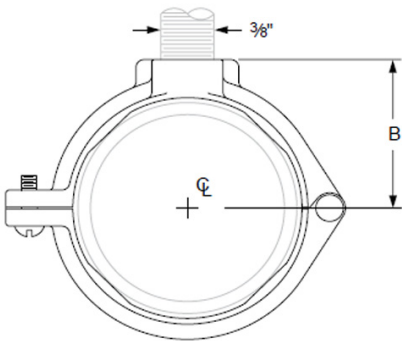

Warranty

See warranty information for more details

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



Hinged Split Ring - Copper SF Series

Product Features

- Size Range: 1/2" through 2"
- Material: Malleable iron
- Finish: Copper-colored Epoxy
- Installation: Permanent installation of clamp may be made before the tubing is placed in position. Final installation is attained by swinging the lower portion of the hinged clamp up under the tubing and inserting a single screw securely.
- Hinged design provides for economical installation
- Designed to provide a tight fit on standard steel pipe.




Certifications

- Approvals: Complies with Federal Specification WW-H-171-E (Type 25), MSS SP-69 and MSS SP-58 (Type 12).

Hinged Split Ring: Loads (LBS) • Weights (LBS) • Dimensions (IN)

Tube-Size	✓ To Submit	Part No.	Max Load	Weight	B
1/2"		ML36978	180	0.07	11/16
3/4"		ML36979	180	0.08	7/8
1"		ML36980	180	0.09	15/16
1 1/4"		ML36981	180	0.12	1 1/8
1 1/2"		ML36982	180	0.14	1 1/4
2"		ML36983	180	0.23	1 9/16

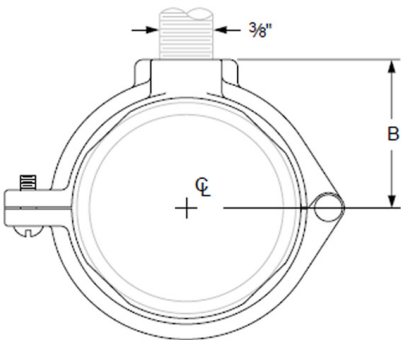

Warranty

See warranty information for more details

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

