


Well Tanks

Product Features

- Heavy-Gauge Steel Tank Construction
 - Electrostatically-Applied Polyester Paint
 - Seamless, One-Piece Water Cell
 - High Impact Composite Base
 - Rubber Stem / Brass Body Schrader Air Valve
 - Reinforced Polypropylene Flange
 - 100% Leak Tested
-
- Maximum Operating Pressure = 100 PSI
 - Maximum Liquid Temperature: 120°F (49°C), 210°F (99°C) for models ML11055 & ML11056
 - Maximum External (Ambient) Temperature: 125°F (52°C)

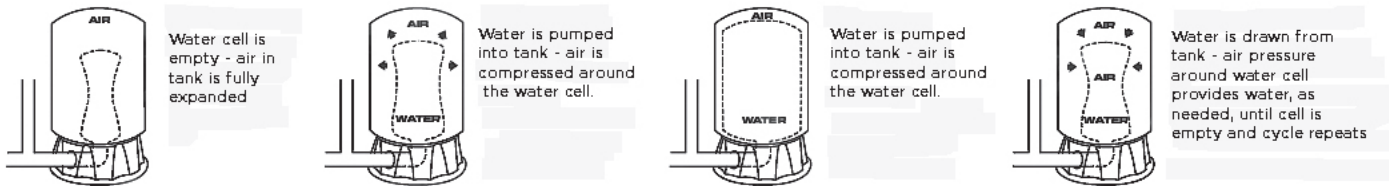

Inline Well Tanks

✓ To Submit	Part No.	Max Capacity Gal.	Diameter In.	Height In.	Precharge PSI	Connection Size	Drawdown in Gallons			Weight Lbs.
							20-40	30-50	40-60	
	ML11055	2	8.4	12.6	20	3/4" MIP	0.7	0.6	N/A	12.6
	ML11056	5	10.6	16.2	30	3/4" MIP	2.2	1.8	1.8	16.2

Freestanding Well Tanks

✓ To Submit	Part No.	Max Capacity Gal.	Diameter In.	Height In.	Precharge PSI	Connection Size	Drawdown in Gallons			Weight Lbs.
							20-40	30-50	40-60	
	ML11066	19	16	27.5	40	1" FIP	6.9	5.8	5.0	40
	ML11067	32	20	43	40	1" FIP	11.6	9.8	8.5	56
	ML11068	50	20	32.5	40	1 1/4" FIP	18.3	15.5	13.4	84
	ML11069	85	24	51	40	1 1/4" FIP	30	26	22	124
	ML11070	119	24	68	40	1 1/4" FIP	41.3	35.4	31	140



Warranty

See warranty information for more details.

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

