


# Hinged Split Pipe Ring

## Product Features

- Size Range: 1/2" through 3"
- Material: Malleable iron
- Finish: Plain or Galvanized
- Maximum Temperature: 450° F
- Rapid installation assured by hinged design and single closure screw.
- When used with nipple this clamp is particularly adaptive for use on refrigeration or compressor piping subject to vibration.
- Interior design provides firm grip on pipe.
- Inside of ring tapered to prevent entrapment of condensed moisture.

## Certifications

- Approvals: Complies with Federal Specification A-A-1192A (Type 12) WW-H-171-E (Type 25), ANSI/MSS SP-69 and MSS SP-58 (Type 12).

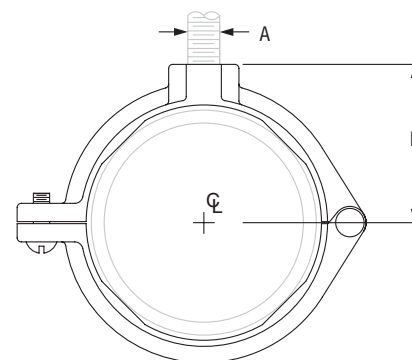

## Hinged Split Pipe Ring: Loads (LBS) • Weights (LBS) • Dimensions (IN)

Pipe Size	✓ To Submit	Part No. Plain	Part No. Galv.	✓ To Submit	Max Load	Weight	Rod Size A	B
1/2		ML37268	ML37280		180	0.13	3/8	7/8
3/4		ML37269	ML37281		180	0.14	3/8	1
1		ML37270	ML37282		180	0.16	3/8	1 1/8
1 1/4		ML37271	ML37283		180	0.22	3/8	1 5/16
1 1/2		ML37272	ML37284		180	0.24	3/8	1 7/16
2		ML37273	ML37285		180	0.31	3/8	1 11/16
2 1/2		–	ML37286		300	0.60	1/2	2 1/8
3		–	ML37287		300	0.74	1/2	2 7/16

## Warranty

See warranty information for more details

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.



# Hinged Split Ring - Copper

## Product Features

- Size Range: 1/2" through 2"
- Material: Malleable iron
- Finish: Copper plated
- Installation: Permanent installation of clamp may be made before the tubing is placed in position. Final installation is attained by swinging the lower portion of the hinged clamp up under the tubing and inserting a single screw securely.
- Hinged design provides for economical installation.
- Designed to provide a tight fit on copper tubing.




## Certifications

- Approvals: Complies with Federal Specification A-A-1192A (Type 12), WW-H-171-E (Type 25), ANSI/MSS SP-69 and MSS SP-58 (Type 12).

## Hinged Split Ring - Copper: Loads (LBS) • Weights (LBS) • Dimensions (IN)

Tube Size	✓ To Submit	Part No.	Max Load	Weight	B
1/2		ML37274	180	0.10	3/4
3/4		ML37275	180	0.12	7/8
1		ML37276	180	0.14	1
1 1/4		ML37277	180	0.18	1 1/8
1 1/2		ML37278	180	0.22	1 1/4
2		ML37279	180	0.36	1 9/16

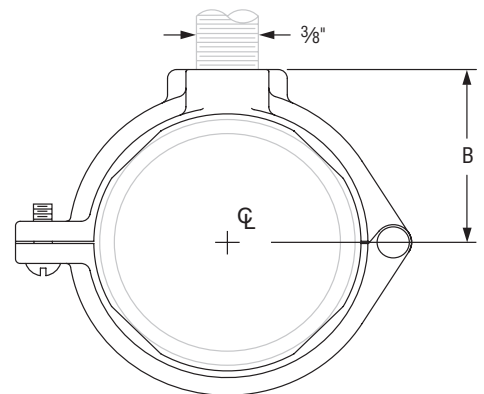

## Warranty

See warranty information for more details

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

